

Bargeboards

Ideally, bargeboards should be positioned so that their lap is directly below the end lap of the sheeting, with the top end of each bargeboard close to the tail end of the sheet in the course above.

Vergeline bargeboards are handed left or right when facing the gable end of the building with the socketed ends of roll top and vergeline bargeboards should point upslope.

The bargeboard lap should be immediately downslope of the sheet lap.


The sheeting should extend as far as possible under the bargeboard to ensure a weatherproof junction is provided. If lap sealant is required for the sheets, the sealant should also be applied to the bargeboards.

No fixing should be within 50 mm of any edge of the bargeboard.


Allow 25 mm clearance between the wall and the bargeboard when the gable is brick or block. Fix both legs of the bargeboard at the purlin positions and intermediate fixings should be introduced as necessary to ensure that both wings of the bargeboards are fixed at 750 mm maximum centres.




PLAIN WING UNSOCKETED AND UNIVERSAL

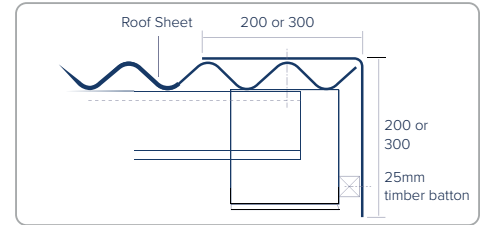

ROLL-TOP SOCKETED AND UNIVERSAL

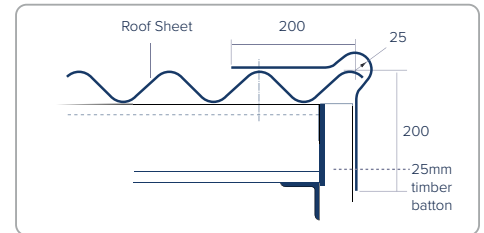

VERGELINE SOCKETED AND HANDED

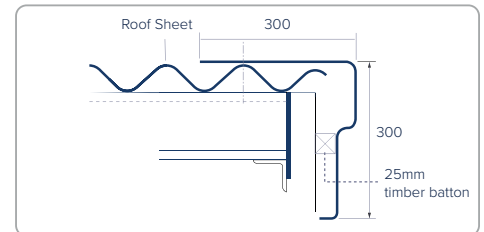

PLAIN WING

GIRTH	200 x 200 mm	300 x 300 mm
1800 mm	✓	✓
2440 mm	✓	✓
3050 mm	✓	✓

ROLL-TOP

GIRTH	200 x 200 mm	300 x 300 mm
1800 mm	✓	✗
2440 mm	✓	✗
3050 mm	✓	✗

VERGELINE

LEFT & RIGHT HANDED

GIRTH	200 x 200 mm	300 x 300 mm
1800 mm	✗	✓
2440 mm	✗	✓
3050 mm	✗	✓

CRANKED PLAIN WING

WINGS	200 x 200 mm								300 x 300 mm							
	5°	7.5°	10°	12.5°	15°	17.5°	20°	22.5°	5°	7.5°	10°	12.5°	15°	17.5°	20°	22.5°
1300 mm	✓	✓	✓	✓	✓	✓	✓	✓	✗	✗	✓	✓	✓	✓	✗	✓
2200 mm	✓	✓	✓	✓	✓	✓	✓	✓	✗	✗	✓	✓	✗	✗	✗	✗

CRANKED ROLL-TOP

WINGS	200 x 200 mm								300 x 300 mm							
	5°	7.5°	10°	12.5°	15°	17.5°	20°	22.5°	5°	7.5°	10°	12.5°	15°	17.5°	20°	22.5°
1300 mm	✓	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗
2200 mm	✓	✓	✓	✓	✓	✓	✓	✓	✗	✗	✗	✗	✗	✗	✗	✗

CRANKED VERGELINE

WINGS	200 x 200 mm								300 x 300 mm							
	5°	7.5°	10°	12.5°	15°	17.5°	20°	22.5°	5°	7.5°	10°	12.5°	15°	17.5°	20°	22.5°
1300 mm	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✓	✓	✓	✓	✗	✓
2200 mm	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗

Tel: +44 (0)1934 641446
sales@briarwoodproducts.co.uk
www.briarwoodproducts.co.uk

